



GENERAL INFORMATION

The boiler of the water heater is hot dip galvalinsed. Galvanising protects the iron sheet from rusting. The Hotex Premium boasts of a Magnesium Anode - The Magnesium Anode Plus feature. The Magnesium Anode provides cathodic protection inside the boiler. It is attacked by the dissolved salts in the water and is "sacrificed" in preference to the boiler body. This arrests corrosion and enhances the life of the boiler.


Note:

- Copper sheathed elements.
- Magnesium Anode protection - extra large size and replaceable.
- Thermal safety cut-out, manually resettable.
- Rated voltage - 220-240V, 50-60 Hz.
- Elements available in 1.1-1.2, 1.6-1.8, 2.1-2.4, 2.9-3.1, 4.7-5.2 & 8.0-9.0 kW rating.



HOTEX GI PREMIUM
EXTRA HOT ON FEATURES, COOL ON PRICE


VERTICAL WALL MOUNTING “AP” SERIES

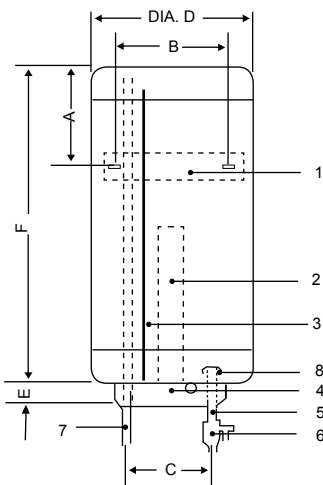

MODEL NO.		AP010BB	AP030BB	AP050BB	AP080BB	AP100BB	AP120BB	AP150BB
CAPACITY IN LTS.		10	30	50	80	100	120	150
DIMENSIONS (mm)	A	120	155	155	170	170	170	170
	B	210	265	265	265	265	265	280
	C	80	100	100	100	100	100	100
	D	250	400	400	450	450	450	450
	E	45	45	45	45	45	45	45
	F	450	370	560	690	840	990	1180
APPROX. WT. IN kg		7.0	11.0	13.5	18.0	21.0	30.0	36.0
RATED INPUT-KW		1.6 -1.8			2.1-2.4		2.9-3.1	
RATED PRESSURE	0.7 MPa							
POWER SUPPLY	Single Phase							
HEAT INSULATION	Polyurethane Foam							
I/O SIZE-B.S.P.T.	1/2"							3/4"
I/O POSITION	Bottom							

1. MOUNTING BRACKET
2. HEATING ELEMENT
3. EXTRA LARGE MAGNESIUM ANODE
4. ELEMENT COVER
5. INLET PIPE
6. SAFETY VALVE
7. OUTLET PIPE
8. ANTI-SPLASH MECHANISM

HORIZONTAL WALL MOUNTING “BP” SERIES

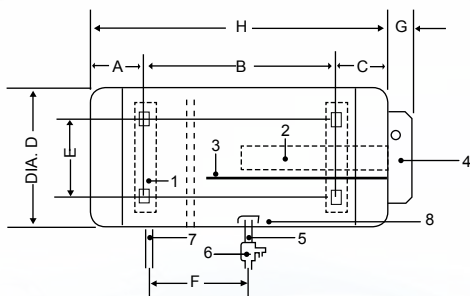

MODEL NOS.		BP010BB	BP030SS	BP050BB	BP080BB	BP100BB	BP120BB	BP150BB
Capacity in Lts.		10	30	50	80	100	120	150
Dimensions (mm)	A	120	105	155	165	170	170	170
	B	210	160	250	360	500	650	840
	C	120	105	155	165	170	170	170
	D	250	400	400	450	450	450	450
	E	210	265	265	265	265	265	280
	F	220	**	160	160	160	160	160
	G	45	45	45	45	45	45	45
	H	450	370	560	690	840	990	1180
APPROX.WT.IN kg		7.0	11.0	13.5	18.0	21.0	30.0	36.0
RATED INPUT-KW		1.6 -1.8			2.1-2.4		2.9-3.1	
RATED PRESSURE		0.7 MPa						
POWER SUPPLY		Single Phase						
HEAT INSULATION		Polyurethane Foam						
I/O SIZE-B.S.P.T.		1/2"						3/4"
I/O POSITION		Bottom						



Note: ** In 30 Lts. inlet/outlet at side only - distance between pipes is 310 mm

1. MOUNTING BRACKETS
2. HEATING ELEMENT
3. EXTRA LARGE MAGNESIUM ANODE
4. ELEMENT COVER
5. INLET PIPE
6. SAFETY VALVE
7. OUTLET PIPE
8. ANTI-SPLASH MECHANISM



HOTEX GI PREMIUM
EXTRA HOT ON FEATURES, COOL ON PRICE

VERTICAL FLOOR MOUNTING “CP” SERIES

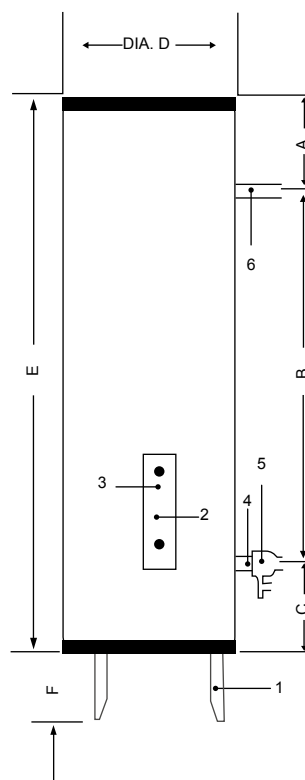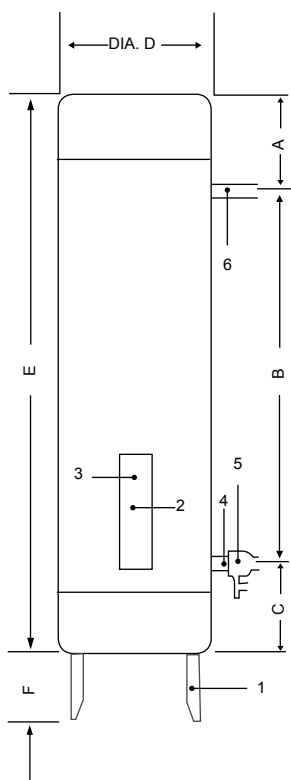


1. LEGS
2. HEATING ELEMENTS WITH MAGNESIUM ANODE
3. ELEMENT COVER
4. INLET PIPE
5. SAFETY VALVE
6. OUTLET PIPE

MODEL NOS.		CP100SS	CP120SS	CP150SS	CP180SS	CP200SS	CP300SS	CP400SS	CP500SS
CAPACITY IN LTS.		100	120	150	180	200	300	400	500
REF. DIAG. NO.		1					2		
Dimensions (mm)	A	155	160	160	160	160	290	290	290
	B	530	670	860	1100	1240	1220	1220	1220
	C	155	160	160	160	160	290	290	290
	D	450	450	450	450	450	560	640	710
	E	840	990	1180	1420	1560	1800	1800	1800
	F	80	80	80	80	80	80	80	80
APPROX.WT.IN kg		21.0	30.0	36.0	42.0	47.0	71.0	81.0	101.0
RATED INPUT-kW		1.6-1.8	2.9-3.1				4.7-5.2	8.0-9.0	
RATED PRESSURE		0.7 MPa					0.4 MPa		
POWER SUPPLY		Single Phase					Three Phase		
HEAT INSULATION		Polyurethane Foam					Fiber Glass		
I/O SIZE-B.S.P.T.		1/2"		3/4"					
I/O POSITION		Side							




HOTEX GI PREMIUM
EXTRA HOT ON FEATURES, COOL ON PRICE

HORIZONTAL FLOOR MOUNTING “DP” SERIES

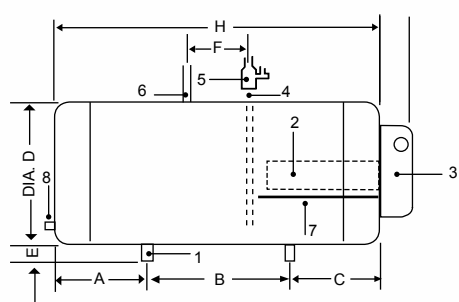

1. MOUNTING BRACKETS
2. HEATING ELEMENTS WITH MAGNESIUM ANODE
3. ELEMENT COVER
4. INLET PIPE
5. SAFETY VALVE
6. OUTLET PIPE
7. EXTRA LARGE MAGNESIUM ANODE
8. DRAIN VALVE

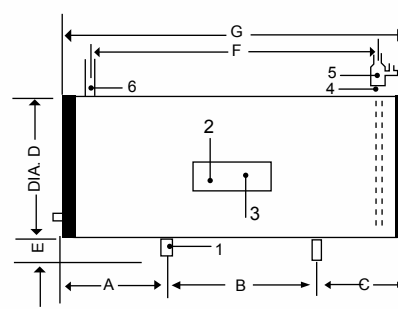

MODEL NOS.		DP100TT	DP120TT	DP150TT	DP180TT	DP200TT	DP300TT	DP400TT	DP500TT
CAPACITY IN LTS.		100	120	150	180	200	300	400	500
REF. DIAG. NO.		1					2		
Dimensions (mm)	A	170	170	170	170	170	480	480	480
	B	500	650	840	1080	1220	840	840	840
	C	170	170	170	170	170	480	480	480
	D	450	450	450	450	450	560	640	710
	E	15	15	15	15	15	60	60	60
	F	160	160	160	160	160	1220	1220	1220
	G	45	45	45	45	45	1800	1800	1800
	H	840	990	1180	1420	1560	-	-	-
APPROX.WT.IN kg		21.0	30.0	36.0	42.0	47.0	71.0	81.0	101.0
RATED INPUT-KW		1.6-1.8	2.9-3.1				4.7-5.2	8.0-9.0	
RATED PRESSURE		0.7 MPa					0.4 MPa		
POWER SUPPLY		Single Phase					Three Phase		
HEAT INSULATION		Polyurethane Foam					Fiber Glass		
I/O SIZE-B.S.P.T.		1/2"		3/4"					
I/O POSITION		Top							




HOTEX GI PREMIUM
EXTRA HOT ON FEATURES, COOL ON PRICE




Specially designed and crafted for concealed fitment above the false ceiling. Available in 35 and 50 liters configurations.

HOTEX SLIM (H.W.M) DIMENSIONS

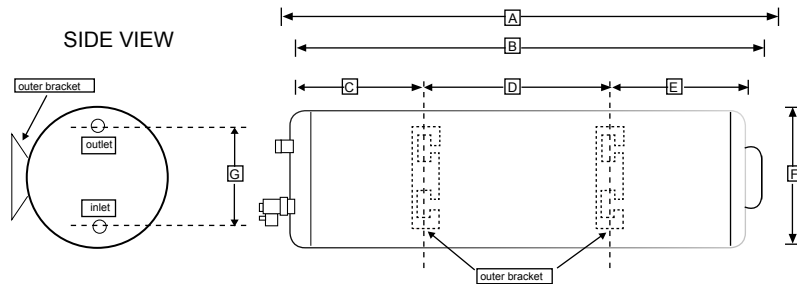

MODEL NOS	CAPACITY	A	B	C	D	E	F	G
BS035SS	35	780	710	155	400	155	295	220
BS050SS	50	1060	990	155	680	155	295	220
RATED INPUT-KW	1.6-1.8							
RATED PRESSURE	0.7 MPa							
POWER SUPPLY	Single Phase							
HEAT INSULATION	Polyurethane							
I/O SIZE BSPT	1/2"							
I/O POSITION	Side							

HOTEX SLIM (H.C.M) DIMENSIONS

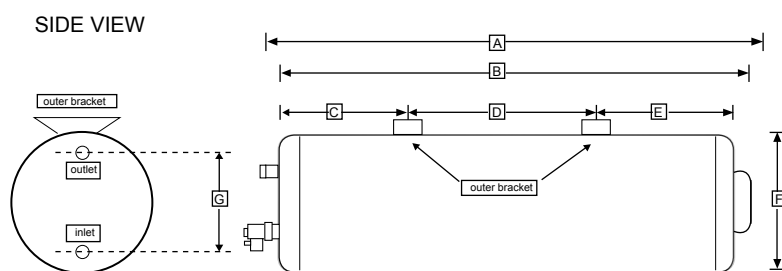

MODEL NOS	CAPACITY	A	B	C	D	E	F	G
BPS 035 SS	35	780	710	155	400	155	295	220
BPS 050 SS	50	1060	990	155	680	155	295	220
RATED INPUT-KW	1.6-1.8							
RATED PRESSURE	0.7 MPa							
POWER SUPPLY	Single Phase							
HEAT INSULATION	Polyurethane							
I/O SIZE BSPT	1/2"							
I/O POSITION	Side							



HOTEX SLIM
HOT ON FEATURES, COOL ON PRICE